


F-220126-1005-1

CURRENT PROBE

The F-220126-1005-1 is used to measure common mode currents from 10 kHz – 400 MHz. It is for laboratory use by properly trained RF technical personnel using best engineering practices.

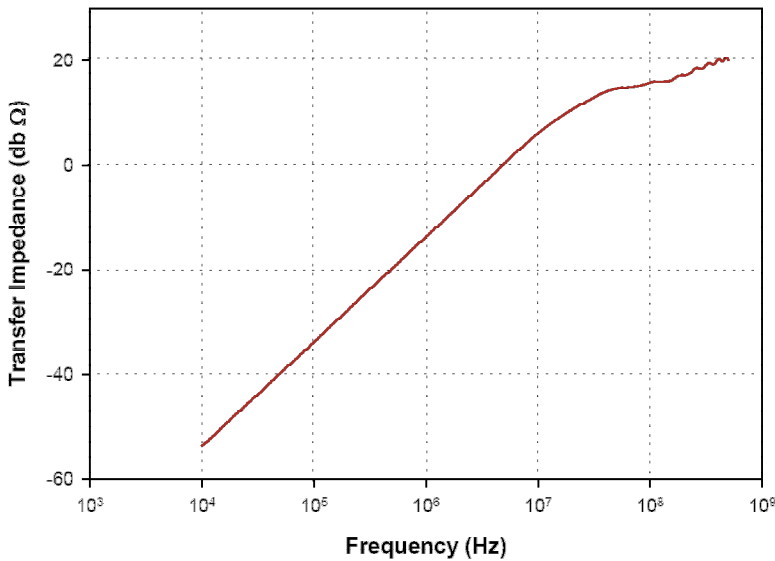

Specifications

- Frequency: 10 kHz – 400 MHz
- Internal diameter: 40 mm
- External diameter: 125 mm
- Height: 21 mm
- Transfer Impedance: See Curve
- Connector: Type-N
- DC to 400 Hz: 600 amperes
- RF(CW): 2 amperes
- Peak Pulse Current¹: 100 amperes

¹: Depends upon the pulse width and pulse rep. rate.



Fischer Custom Communications, Inc.

19220 Normandie Ave., Unit B Torrance, CA 90502
Phone: 310-303-3300
Email: sales@fischercc.com

© Fischer Custom Communications, Inc.